



QUTONE CERAMIC PVT. LTD.
(OFFICES & SHOWROOMS)

CORPORATE

Ahmedabad
11, Titanium, Corporate Road,
Opp. Prahalad Nagar Garden, Satellite,
Ahmedabad-380 015, Gujarat, India.
Tel.: +91 79 65108800-9900, 40300075

OVERSEAS

Italy
Via Regina Pacis, No.32, 1st Floor,
Sassuolo (MO), 41049, Italy.
Tel.: +39 05 97880035

REGIONAL

Delhi, NCR
Plot No. 117, Sector 44,
Gurgaon-122003, Haryana.
Tel.: +91-124-4223770

Mumbai
2nd Floor, Chedda Arcade,
Khira Nagar, S V Road,
Santacruz (W), Mumbai-400054
Maharashtra

Bangalore
FF09, City Point, #13, Infantry Road,
Bangalore - 560001, Karnataka.
Tel.: +91-80-40922655

Jaipur
1-A, Deep Vihar Village, Manyawas,
Jaipur - 302020, Rajasthan.

Kochi
A.K.M. Charitable Trust, A.K. Towers,
2nd Floor, South Kalamaserry,
Kochi - 682033, Kerala.

Hyderabad
Flat No. G2, 1-20-268, Survey No. 72,
Kaizen Mirza White House, Nr. Begumpet,
Rasoolpura, Secunderabad - 500003.

Chennai
41/158, North Usman Road,
T.nagar, Chennai-600017

For Sales Enquiry:

SOUTH ZONE

ANDHRA PRADESH | KERALA | KARNATAKA | TAMIL NADU/PONDICHERRY
+91 76809 06394 | +91 8138 998991 | +91 88844 85020 | +91 89398 90699

WEST ZONE

MAHARASHTRA | GUJARAT | MADHYA PRADESH | GOA
+91 77188 56703 | +91 75748 19814 | +91 95222 89551 | +91 73786 77068

EAST ZONE

WEST BANGAL | ORISSA | CHHATISGRAH | ASSAM | 7 STATES | JHARKHAND | BIHAR | NEPAL
+91 90882 26611 | +91 73810 47190 | +91 95222 69201 | +91 94350 11068 | +91 72800 02736 | +91 90990 41109

NORTH ZONE

DELHI | HARIYANA | UTTAR PRADESH | UTTARAKHAND | CHANDIGARH | PUNJAB | J&K | HIMACHAL PRADESH | RAJASTHAN
+91 85888 45117 | +91 99150 40096 | +91 98285 71315

info@qutoneceramic.com

www.qutoneceramic.com



imarble
INCREDIBLY ITALIAN

800 x 1200mm

OCPLImmini 8x41120165x

HOW WE CREATE VALUE

Creating something new starts with defining where you want to go, what you want to achieve. It starts with an idea, a vision you embody for something better, an obsession you have And for us, it all starts with an innovation. Innovation is our very purpose. Through innovation we have the power to change lives. We are obsessed with inspiring people to harness the power of innovation in their lives.

WHY imarble ?

I- marble, an intelligent innovation from the house of Qutone is been considered as future against marble. With enhanced strength, large size, myriad designs and textures, flawless consistency and resistance to scratch, stains and bacteria it is touted as the next biggest invention. A slab equipped with superior features to beautify your interiors, cladding and flooring, it is an advancement set to revolutionize the tiles industry.

THE TECHNOLOGY

From its inception, Qutone Ceramics has been committed to innovation with advanced technological application in its entire product range. The company has been a pioneer in several hi-tech innovations that have set trends in the tile industry.

Right from the introduction of IQ Smart, first slim flexible tiles, to high end Elegante, Qutone has upgraded itself to the fully automatic state-of-the-art modern slab plant in the world. Being first in Asia and 4th in Globe, Qutone has deployed world's latest and largest press system GEA 44000, a technology to revolutionise press system creating slabs without mould. It is the new automatic technology of power feeding system cutting various sizes uniformly. GEA 44000 facilitates creation of slab measuring upto 1600x 4800mm with standard W.A of less than 0.05%.

Complete online cutting of slabs and automatic packing in specialised packaging makes the whole manufacturing process automatic ensuring 100% precision in cutting and texturing. The technology application for the processing of I-marble makes the product an intelligent innovation set to give new definitions to the meaning of tiles.

FEATURES



Installation Friendly

What makes the iMarble intelligent are the grand sizes it is available in. This makes installation a very simple task. For example, one single slab of 1200x 2400mm will replace 8 tiles of standard 600x 600mm size.

Pre-Polished

Polishing natural marble is a hard task since one has to find a mason to buff the surface of the marble. However, iMarble's processed body is highly polished and retains it for years.



Light Weight

The iMarble weighs at least 60% less than traditional and current Italian marble. This adds to the simplicity of installation and transport of the slabs.


Resin-Free

Resin is a synthetic polymer used as an adhesive for treating cracks in natural marble. iMarble uses no resin treatment as there are no cracks in it. Since resin has an adverse effect on the skin, iMarble is a far more better and healthier option than natural marble.



Zero Porosity Ensuring Anti-Fungal Life

Another quality that iMarble is imbued with is its low or zero porosity. When water settles on natural marble, it seeps in, making the marble weak, inviting fungal, algae growth, etc. With iMarble, all these problems can be avoided.

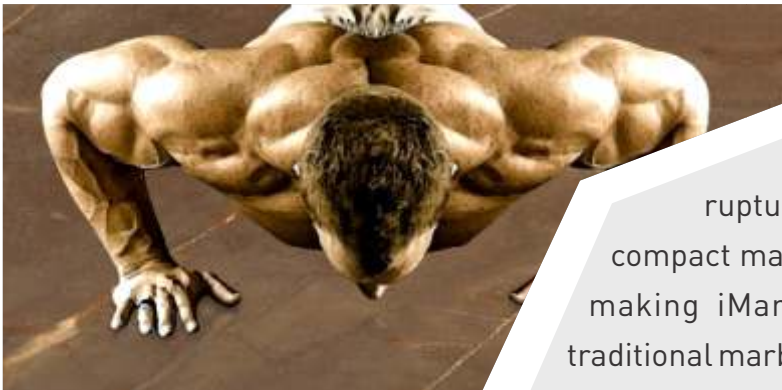

Compact Body/ High MOR

Natural marble has a very low modulus of rupture (MOR), while processed slabs of iMarble are compact made and have a very high breakage strength, making iMarble a far more stronger choice than traditional marble.

Zero Maintenance

Even when used in high-traffic areas, iMarble needs minimum care because of its low porosity, highly compact body and high hardness index.



Facades

Apart from just flooring, iMarble can be used in many other applications like, facades, lifts, ventilated and non-ventilated facades. iMarble can be installed easily by means of wet/dry cladding.

imarble

INCREDIBLY ITALIAN

800x1200mm





APOLLO BEIGE

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE

BOTTO NEO

Finish: Polished



imarble | 800 x 1200 mm
INCREDIBLY ITALIAN



DEO BEIGE
Finish: Polished



FEATHER
Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE



MARCO BEIGE

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE

CREE BEIGE

Finish: Polished



imarble
INCREDIBLY ITALIAN

800 x 1200 mm



SOUND CREMA

Finish: Polished



TAMPTATION BROWN

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE



imarble
INCREDIBLY ITALIAN

800 x 1200 mm

WILSON CREMA

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE

WILSON GREY

Finish: Polished



marble
INCREDIBLY ITALIAN

800 x 1200 mm



VECTOR GREY

Finish: Polished



TRAVOLTA

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE



TRIVAGO
Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE



imarble
INCREDIBLY ITALIAN

800 x 1200 mm

TITAN BEIGE
Finish: Polished





imarble
INCREDIBLY ITALIAN

800 x 1200 mm



SANTAFE BIANCO

Finish: Polished



SUMMER WHITE

Finish: Polished



GLOSSY



FLOOR TILE



WALL TILE



BLACK RIVER

Finish: Polished Dark



GLOSSY



FLOOR TILE



WALL TILE



imarble
INCREDIBLY ITALIAN

800 x 1200 mm

TACO BRUNO

Finish: Polished Dark





marble

800 x 1200 mm

TACO CHARCOAL

Finish: Polished Dark



LEGNA BROWN

Finish: Polished Dark



GLOSSY



FLOOR TILE



WALL TILE



CRETA NEO
Finish: Polished Dark



GLOSSY



FLOOR TILE



WALL TILE

CEMENTIS BIANCO
Finish: Matt



MATT



FLOOR TILE



WALL TILE

imarble
INCREDIBLY ITALIAN

800 x 1200 mm



CEMENTIS ASH

Finish: Matt



MATT



FLOOR TILE



WALL TILE

CEMENTIS MOCHA

Finish: Matt





imarble
INCREDIBLY ITALIAN

800 x 1200 mm


CEMENTIS BRUNO

Finish: Matt



CEMENTIS CREMA

Finish: Matt

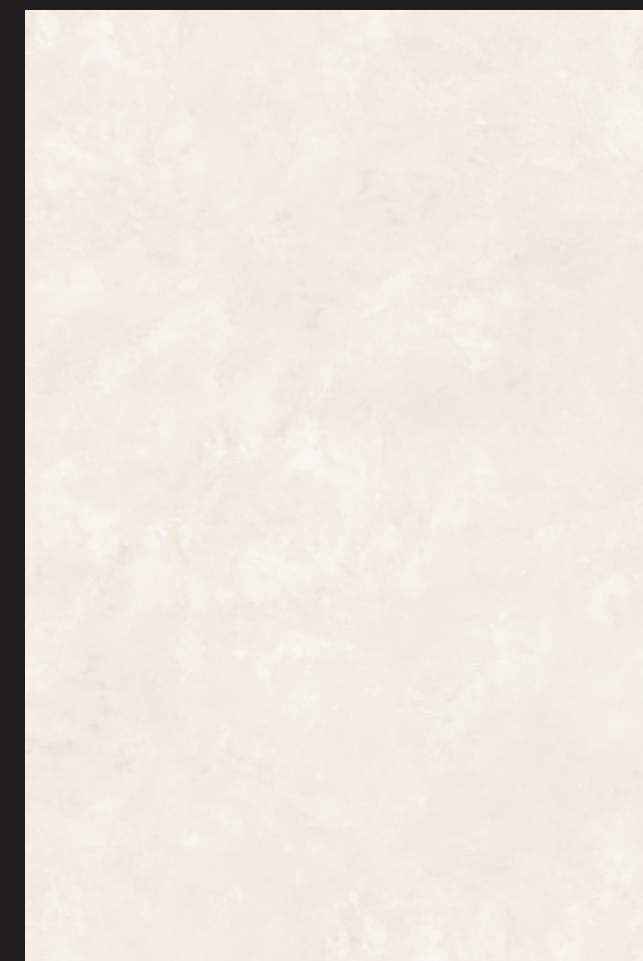

MATT



FLOOR TILE



WALL TILE

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO-13006/ En14411 GROUP	iMARBLE VALUE	TEST METHOD
	Regulatory Properties		
Deviation in Length & Width	±0.50%	±0.10%	ISO - 10545-2
Deviation in Thickness	±5.00%	±4.00%	ISO - 10545-2
Straightness of Sides	±0.50%	±0.10%	ISO - 10545-2
Rectangularity	±0.50%	±0.10%	ISO - 10545-2
Surface Flatness	±0.50%	±0.20%	ISO - 10545-2
Colour Difference	Unaltered	No Change	ISO - 10545-16
Glossiness	As per Mfg.	>90%	Glossmeter
	Structural Properties		
Water Absorption	≤0.05	≤0.05	ISO - 10545-3
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
	Massive Mechanical Properties		
Modulus of Repture	Min 35N/mm ²	Min 40N/mm ²	ISO - 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO - 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO - 10545-5
	Surface Mechanical Properties		
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO - 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	EN 101
	Thermo Hygrometric Properties		
Frost Resistance	No Damage	No Damage	ISO - 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO - 10545-09
Moisture Expansion	Nil	Nil	ISO - 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO - 10545-08
Crazing Resistance	As per Mfg.	Min. 10 Cycle	ISO - 10545-11
	Chemical Properties		
Chemical Resistance	No Damage	No Damage	ISO - 10545-13
Stain Resistance	Resistant	Resistant	ISO - 10545-14
	Safety Properties		
Slip Resistance	As per Mfg.	>0.40	ISO - 10545-17
Fire Resistance	As per Mfg.	Fire Proof	N.A.

Packing Details

Dimension (mm)	Thickness*	SLAB	Sq.mtr.	Sq.ft.	Weight (Apx)
800x1200mm	± 9mm	2	1.92	20.67	42kg